

HPC

ELECTRO-PERMANENT LIFTER WITH CONTROLLER

Combined magnet and controller in one small package with quick disconnnet





Features

- Electro-permanent technology means clamping force remains even with loss of power supply
- Built in controller make it extremely easy for the operator
- Quick connector make it very mobile
- Push button with stautus lights on board the magnetic module
- With reduced power pick up sequence providing safe lifts every time



Applications

Handling of plates, blocks, bars, finished parts

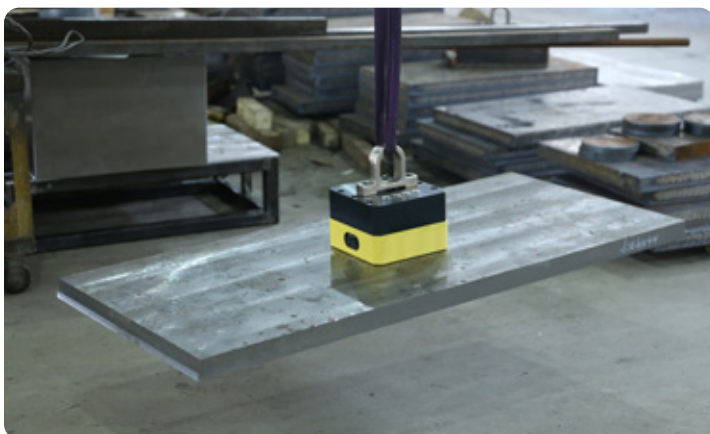

Specifications

mm(inch)

Model	Size	Length(L)	Width(W)	Height(H)	Net Weight	Flat load Max	Min thickness	Flat size Max
HPC	1000	290 (11.42)	230 (9.06)	82 (3.23)	45 kg / 99 lb	1000 kg/2200 lb	8 (0.3)	2000x1000 (78x39)
HPC	2000	410 (16.14)	230 (9.06)	82 (3.23)	63 kg / 138 lb	2000 kg/4400 lb	8 (0.3)	3000x1500 (118x59)
HPC	3000	680 (26.77)	230 (9.06)	82 (3.23)	104 kg / 228 lb	3000 kg/6600 lb	8-15 (0.3-0.6) >15 (>0.6)	3000x1500 (118x59) 4000x2000 (157x78)
HPC	4000	860 (33.86)	230 (9.06)	82 (3.23)	130 kg / 286 lb	4000 kg/8800 lb	8-15 (0.3-0.6) >15 (>0.6)	3000x1500 (118x59) 4000x2000 (157x78)